

# 50LU5



Scan me on your phone camera to watch our assembly video.





**USER MANUAL** 

PRODUCT CODE: WA02010042

#### INTRODUCING THE ILITE SOLUS CARBON ROLLATOR

The perfect combination of strength and style, designed to provide you with unparalleled support and mobility. Say hello to the iLite Solus Carbon Fibre Rollator.

Due to CareCo's commitment to continuous product improvement, product information and designs are subject to change without notice. No claims can be made based on the data and illustrations in this user manual.

Unauthorized modifications and/or installation of unapproved 3rd party components and accessories are not permitted.

The latest/current version of this user manual is available on our website.



CareCo (UK) Limited, 1 Turing Court, Great Notley, Braintree, CM77 7AT Tel: 0333 015 5000 www.CareCo.co.uk

Thank you for choosing CareCo.



This manual can be viewed in PDF format at the following URL: www.careco.co.uk



#### **BEFORE USE**

Before using your rollator, please ensure you, and any persons that may assist you in its use, take the time to read, understand and follow the instructions provided within this user manual.

We recommend that you keep this user manual in a safe place for future reference.

If you have any further questions about product use, maintenance or safety, please contact CareCo.

#### **KEY DEFINITIONS**

This user manual contains warnings and suggestions marked with the following symbols:



MARNING! Highlights a potentially hazardous condition/situation for the user and/or product.



**SUGGESTION** General suggestions and advice for operating the product.

# Need help with assembly?

We've put together a step-by-step assembly guide to help you get your product set up safely and correctly. Just scan the QR code with your phone camera to play the video.



# **CONTENTS**

GETTING STARTED	6
CARTON CONTENTS	
PRODUCT COMPONENTS	
SETTING UP YOUR ILITE SOLUS CARBON FIBRE ROLLATOR	
HOW TO USE YOUR ROLLATOR	9
USER INSTRUCTIONS	
APPLYING THE BRAKES	
FOLDING & UNFOLDING	
COMFORT ADJUSTMENTS	12
HANDLE HEIGHT ADJUSTMENT	
ACCESSORIES	13
BACKREST STRAP	
STORAGE BAG	
TRANSPORTATION & STORAGE	14
TRANSPORTATION	
STORAGE	
LOOKING AFTER YOUR ROLLATOR	15
CLEANING	
MAINTENANCE	
MAINTENANCE SCHEDULE	
REPAIRS	



WARNINGS & TECHNICAL INFORMATION	17
SPECIFICATIONS	
PRODUCT REISSUING	
RECYCLING & DISPOSAL	
INTENDED USE	
PRODUCT IDENTIFICATION	
GENERAL WARNINGS	
EXPECTED LIFETIME	21
WARRANTY	22
NOTES	23

# **GETTING STARTED**

Contact CareCo immediately if any of the listed contents are missing.

ITEM NUMBER	DESCRIPTION	QUANTITY
1	iLite Solus Carbon Fibre Rollator	1
2	iLite Carry Bag	1
3	Backrest Strap	1
4	Hex Key	1



We strongly recommend that you keep the box and internal packaging for the duration of your warranty period.

#### **PRODUCT COMPONENTS**



- 1. Backrest Strap
- 2. Height Adjustable Handle
- 3. Loop Brake
- 4. Carry Bag
- 5. Canvas Seat
- 6. Carbon Fibre Frame
- 7. Front Wheel
- 8. Rear Wheel



#### SETTING UP YOUR ILITE SOLUS CARBON FIBRE ROLLATOR



1. Remove all rollator components from the outer packaging, then place them onto a level surface.



2. Unhook the frame securing strap.



3. Pull the handles outwards to open the rollator, then firmly press downwards on the seat tubes to secure the frame.



4. Install the backrest strap using the supplied hex key and bolts.



- 5. Place the carry bag onto the bag hangers.
  - SUGGESTION Test the rollator brakes before use to ensure they function correctly. If for any reason the rollator needs to be disassembled, use the set-up instructions as a guide to disassemble the rollator.



#### **HOW TO USE YOUR ROLLATOR**

#### **USER INSTRUCTIONS**



#### WALKING POSITION

Walk with the rollator close to your body, face forwards and ensure your back is straight.

#### **USER CONTROL**

Hold the handles with a comfortable grip and allow your arms to sit naturally by your side.

#### **NEGOTIATING THRESHOLDS & OBSTACLES**

Use the rear stepper to tilt the front of the rollator upwards when travelling through doorways and over curbs.

#### SITTING & RESTING

Use the seat to rest when needed, ensuring the brakes have been applied and the rollator is on a flat, even surface.

Do not use the product as a transportation device.

#### **LIFTING & CARRYING**

Grasp the handles or areas of the frame that are clear from pinch points, then lift with your legs.

Hold the rollator at a comfortable and manageable height when moving from one location to another.

#### APPLYING THE BRAKES

#### **STOPPING**

Gradually squeeze both brake levers to stop the rollator. Release the brake levers to start moving again.

#### **TURNING**

Squeeze the left and right brake levers individually to rotate the rollator.

Release the brake lever to stop rotating.



Push both brake levers downwards to apply the brake lock.

An audible "click" will confirm the brakes are secure.

#### **UNLOCKING**

Pull both brake levers upwards to unlock the brakes.







**! WARNING!** Ensure the rollator is stationary when locking the brakes.



**SUGGESTION** Regularly test the brakes to ensure they function correctly.



#### **FOLDING & UNFOLDING**



#### **FOLDING**

Push downwards on the brake levers to apply the brake lock.

Lift the carry bag away from the rollator.

Pull the seat handle upwards to fold the rollator.

Secure the folded position using the securing strap.



#### **UNFOLDING**

Unhook the frame securing strap.

Pull the handles outwards to open the rollator, then firmly press downwards on the seat tubes to secure the frame.

Place the carry bag onto the bag hangers.

Pull both brake levers upwards to unlock the brakes.



MARNING! Keep hands and body away from cross frame pivot to avoid possible pinch points.

# **COMFORT ADJUSTMENTS**

#### HANDLE HEIGHT ADJUSTMENT

To set the correct handle height, stand upright behind the rollator with your arms by your side, then adjust the height of the handgrips until they are level with your wrists.

- 1. Press and hold the height adjustment button whilst lifting/lowering the handle.
- 2. Release the button when the handle is at the desired height.

An audible "click" will confirm the handle is secure.

3. Repeat on the other side.



**MARNING!** Ensure both handles are at the same height and are secure before use.



#### **ACCESSORIES**

#### **BACKREST STRAP**

#### **ATTACHING**

Install the backrest strap using the supplied hex key and bolts.

#### **REMOVING**

Remove the bolts using the supplied hex key.





**!** WARNING! Ensure the backrest is secure before using the rollator as a seat.

#### **STORAGE BAG**

#### **ATTACHING**

Place the carry bag onto the bag hangers.

#### **REMOVING**

Lift the carry bag away from the rollator.

MAX CARRY WEIGHT 🚨 5 KG







**! WARNING!** Do not exceed the maximum carry weight of 5KG.

#### TRANSPORTATION & STORAGE

#### **TRANSPORTATION**

Ensure the brakes have been applied and any adjustable parts have been properly secured to avoid transit damage.

Fold the rollator following the instructions found within this user manual, then position it appropriately within the desired vehicle to prevent excess movement.



**SUGGESTION** Secure the folded frame by attaching the frame securing strap.

#### **STORAGE**

Store the rollator in a cool and dry environment. Do not store in extreme temperatures.

#### MIN/MAX STORAGE TEMPERATURE

-10°C - 40°C



NARNING! Storing the product in extreme temperatures can cause premature rusting & damage. Do not place heavy objects on top of the rollator.



#### LOOKING AFTER YOUR ROLLATOR

#### **CLEANING**

To keep the rollator in optimal condition, it should be cleaned regularly with a damp cloth and/or mild soap. Do not use abrasive cleaners/materials.

Dry the rollator after cleaning and after use in bad weather conditions.

#### **MAINTENANCE**

The rollator is made up of components which over time will become susceptible to wear and tear. Knowing how to properly care and maintain your product will not only ensure peak performance and safe operation but will also help maintain operation for years to come.

#### **MAINTENANCE SCHEDULE**

Carry out regular inspections to keep the rollator in optimum condition.

COMPONENT	INSPECTION DESCRIPTION	AT ANY TIME	WEEKLY	MONTHLY	QUARTERLY
Tyres/Wheels	Ensure tyres have sufficient tread and the wheels are in a good condition.				0
Framework	Ensure the framework is clear from debris, damage, and disassembles without issue.	0			
Fasteners	Ensure all fasteners are tight and components are not loose.				0
Upholstery	Check for wear and tear.		0		
Overall	Overall check for wear and residue build-up. Cleaning if required			0	

#### **REPAIRS**


Certain rollator components can be repaired by the user with guidance provided by CareCo. Other components can only be repaired/replaced by a service technician.

If for any reason the rollator requires repair due to a defect, contact CareCo immediately.

# **OTHER ADJUSTMENTS**

#### **BRAKE CABLE ADJUSTMENT**

# **Difficulty Level**





# **Tools Required**

8mm Spanner x1

Adjust the brake cable tension using simple household tools.

1. Adjust the brake cable tension by rotating the brake adjuster.



4

**SUGGESTION** Test the rollator brakes before use to ensure they function correctly.



# **WARNINGS & TECHNICAL INFORMATION**

# **SPECIFICATIONS**

OVERALL LENGTH (MM)         650           OVERALL WIDTH (MM)         620           OVERALL HEIGHT (MM)         780 - 980           MIN/MAX HANDLE HEIGHT (MM)         780 - 980           FOLDED LENGTH (MM)         650           FOLDED WIDTH (MM)         220           FOLDED HEIGHT (MM)         780 - 980           FRONT WHEEL DIAMETER (IN)         8           REAR WHEEL DIAMETER (IN)         8
OVERALL HEIGHT (MM)       780 - 980         MIN/MAX HANDLE HEIGHT (MM)       780 - 980         FOLDED LENGTH (MM)       650         FOLDED WIDTH (MM)       220         FOLDED HEIGHT (MM)       780 - 980         FRONT WHEEL DIAMETER (IN)       8
MIN/MAX HANDLE HEIGHT (MM)  FOLDED LENGTH (MM)  FOLDED WIDTH (MM)  220  FOLDED HEIGHT (MM)  780 - 980  FRONT WHEEL DIAMETER (IN)  8
FOLDED LENGTH (MM)  FOLDED WIDTH (MM)  FOLDED HEIGHT (MM)  FRONT WHEEL DIAMETER (IN)  8
FOLDED WIDTH (MM)  FOLDED HEIGHT (MM)  FRONT WHEEL DIAMETER (IN)  8
FOLDED HEIGHT (MM)  FRONT WHEEL DIAMETER (IN)  8
FRONT WHEEL DIAMETER (IN) 8
REAR WHEEL DIAMETER (IN) 8
CARRY WEIGHT (KG) 5.9
BAG MAX CARRY WEIGHT (KG) 5
WEIGHT OF HEAVIEST COMPONENT (KG) 5.3
WEIGHT CAPACITY* (KG) 135
SEAT WIDTH (MM) 460
SEAT DEPTH (MM) 208
SEAT HEIGHT (MM) 630
MIN/MAX OPERATING TEMPERATURE (_°C) -10°C - 40°C
MIN/MAX STORAGE TEMPERATURE (_°C) -10°C - 40°C
TYRE TYPE SOLID
EXPECTED SERVICE LIFE (YEARS) 5

<sup>\*</sup> The maximum weight limit for this product includes both the user and any other accessories fitted.

#### PRODUCT REISSUING

Ensure the product is safe and functions as intended before re-issuing.

#### **RECYCLING & DISPOSAL**

Disposal or recycling of the rollator should be completed through an approved distributor or disposal facility. (Local disposal & recycling regulations may apply)

Alternatively, contact CareCo for advice on disposal.

#### **MATERIAL**

UPHOLSTERY ALUMINIUM

Foam, Nylon fabric, Sponge with PVC coating Cross-Frame

PLASTIC STEEL

Hand grip, Brake housing, Brake lever, Wheel Brake Cable, Bearings, Fixings

castor, Front fork, Tube plugs,

#### **CARBON FIBER**

Main Framework

#### **PACKAGING**

Cardboard Box, Low-density polythene bag, PE foam

#### **INTENDED USE**

This product is intended for users who experience difficulty in walking and/or have reduced mobility.

#### **INTENDED USER**

To aid a user with mobility limitations to move around safely.


#### INTENDED ENVIRONMENT

This product is designed to be used both indoors and outdoors on firm, level ground. Take care when using the product in inclement weather conditions.



#### PRODUCT IDENTIFICATION

The product identification label is located on the cross-frame underneath the seat.

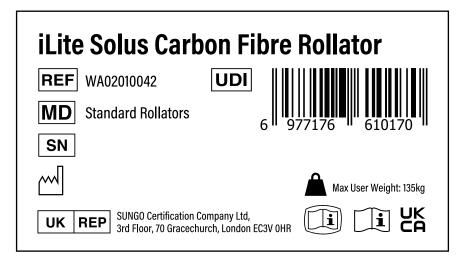

#### **DEFINITIONS**

Non sterile



#### **GENERAL WARNINGS**

Read the following carefully to avoid damage and/or injury caused by improper operation.

- Only use the rollator for its intended use, incorrect use can lead to hazardous situations.
- Only use the rollator on even and solid surfaces.
- Do not overfill the product bag Maximum load 5KG.
- Prolonged exposure to hot or cold temperatures can cause parts of the rollator to become hot or cold.
- Do not use the rollator as a transportation device.
- Replace damaged or significantly worn parts if and when required.
- Periodically test the brakes to ensure safe use.
- Do not sit on the rollator when on an incline or uneven ground.



#### **EXPECTED LIFETIME**

The Expected Lifetime is the estimated period of time for which the rollator is expected to function according to its intended use.

Various items such as weight capacity, user behaviour, external conditions and intensity of use can affect the expected lifetime.

#### **WEIGHT CAPACITY:**

# If the user exceeds the weight limit specified, it may affect the rollator's expected lifetime.

#### **EXTERNAL CONDITIONS:**

Extreme temperatures, humidity and exposure to harsh weather conditions can accelerate the deterioration of the rollator.

#### **USER BEHAVIOUR:**

Using excessive force, rough handling or dropping components can significantly shorten the rollator's expected lifetime.

#### **USAGE:**

A rollator that is used daily may experience more wear and tear compared to a rollator that is used occasionally.

The expected lifetime for the rollator is 5 years providing the instructions and information within this user manual are followed.

Regular cleaning, lubrication of moving parts, and tightening of loose fixings will prevent premature wear and damage and extend the product's lifetime.

The expected lifetime is not related to the product warranty.

#### WARRANTY

If a component requires repair or replacement due to a specific manufacturing or material defect within its warranty period, it will be repaired or replaced free of charge by CareCo.

- CARBON FIBRE FRAMEWORK: 5-YEAR WARRANTY
- NON-CONSUMABLE COMPONENTS: 1-YEAR WARRANTY

Consumables are not covered under normal warranty circumstances unless they have clearly suffered excessive wear or damage as a direct result of a manufacturing defect. These items include grips, tyres, and rubber accessories.

The guarantee for the rollator is not transferable.

Parts that have been previously replaced that require subsequent repair or replacement due to manufacturing defects will be honoured for the remainder of the rollator's warranty period.

Parts that have been purchased by the end user after the original warranty period has expired have a warranty period of 12 months.

CareCo is not responsible if the rollator requires repair or replacement as a direct result of:

- Changes or modifications made to the product that fall outside of the manufacturer's specifications.
- The product not being serviced or maintained according to the manufacturer's recommendations contained in this user manual.
- Negligence, Accidental Damage, and Improper use.
- Repairs attempted before CareCo have been notified.
- The product being purposely damaged or mistreated.

In the unlikely event that this product is recalled, CareCo will notify the user.

Please ensure that your contact information is up to date.

Alternatively, please visit our website for any product alerts: www.CareCo.co.uk



# **NOTES**



